

TREADED FASTENERS

HEX NUTS DIN-934 (HXN)


Our range of metric nuts covers all the popular types in a wide range of sizes in Bright Zinc Plated, Galvanised, Stainless Steel A2 & A4, Brass and Nylon. Steel nuts are Grade 8 and compatible with Grade 8.8 high tensile fasteners.

Grade 8 hexagon full nuts & Bright zinc plated.



DIN 934

ISO 4032 EN 24032

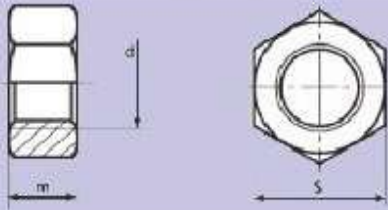

Hexagon nuts

d	M3	M4	M5	M6	M7	M8	M10	M12	M14
P	0,5	0,7	0,8	1	1	1,25	1,5	1,75	2
m	2,4	3,2	4	5	5,5	6,5	8	10	11
s	5,5	7	8	10	11	13	17/16*	19/18*	22/21*


d	M16	M18	M20	M22	M24	M27	M30	M33	M36
P	2	2,5	2,5	2,5	3	3	3,5	3,5	4
m	13	15	16	18	19	22	24	26	29
s	24	27	30	32/34*	36	41	46	50	55

LOCK NUT/THIN NUT (LN)

It's used in conjunction with a full nut to lock the nut onto the bolt thread. The full nut is tightened first followed by the locknut. Using two spanners the full nut is reversed against the locknut to produce a locking action.



DIN 439

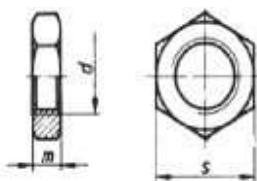

DIN 439 Left Hand Thread Thin-Lock Nuts												
d	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
m	3,2	4	5	6	7	8	9	10	11	12	13,5	15
s	10	13	17 (ISO 16)	19 (ISO 18)	22 (ISO 21)	24	27	30	32 (ISO 34)	36	41	46

AVAILABLE IN : HOT DIP GALVANIZED, BRIGHT ZINC, STAINLESS STEEL

Finish Suffix Legend:

Hot Dip Galvanized After Fabrication - **H**

Pre-Galvanized - **PG**

Electroplated Zinc - **Z**

Stainless Steel Type 304 - **S4**

Stainless Steel Type 316 - **S6**