

Product Data Sheet

Fixing Band

Description

Pre-drilled perforated fixing band, which can be shaped and cut to length to avoid wastage.

Suitable to secure cables, pipes, ducts and conduits.

Working Temperature

(Powder coated): 180°C - suitable for use in LSF environments.

Material:

Galvanised steel: Q/BQB 420-2009
 DC51D+Z-140/140-M-FC-C5
 Copper: C103




Part No.	Colour / Finish	Length - meters	Width - mm	Thickness - mm	Fixing Hole Dia - mm
ARB12/BL	Black	10	12	0.9	5.0
ARB12/WH	White	10	12	0.9	5.0
ARB12/RED	Red	10	12	0.9	5.0
ARB12/GA	Galvanised	10	12	0.9	5.0
ARB12/C	Copper	10	12	0.9	5.0
ARB12/AL	Aluminium	10	12	0.9	5.0

ARB17/BL	Black	10	17	0.9	7.0
ARB17/WH	White	10	17	0.9	7.0
ARB17/RED	Red	10	17	0.9	7.0
ARB17/GA	Galvanised	10	17	0.9	7.0
ARB17/C	Copper	10	17	0.9	7.0
ARB17/AL	Aluminium	10	17	0.9	7.0

PRODUCT: FIXING BAND

SPECIFICATIONS:

- MATERIAL: Galvanised Mild Steel
- FINISH SIZE: Natural or Black Powder Coated
- SIZE: 17MM X 0.8MM X 10MTR
- PACKING: 10MTR/CARDBOARD BOX

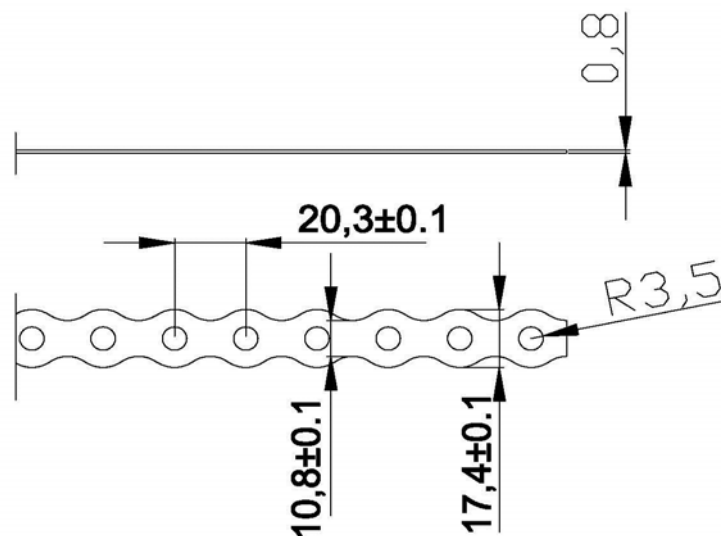

PRODUCT: FIXING BAND

SPECIFICATIONS:

- **MATERIAL:** Galvanised Mild Steel
- **FINISHSIZE:** Natural or Black Powder Coated
- **SIZE:** 12MM X 0.8MM X 10MTR
- **PACKING:** 10MTR/CARDBOARD BOX

