

Lighting Trunking Technical Specification

STANDARDS & SPECIFICATIONS

Lighting Trunking

A range of 50mm x 50mm lighting trunking and accessories supplied in 3 and 5 metre lengths manufactured from galvanised sheet steel. Individual lengths of trunking are connected together by 300mm long internal sleeve couplers. The trunking lid is designed to clip into the body of the trunking section and is manufactured from steel or plastic in standard lengths of 2 metres or 3 metres. The lighting trunking is also available in 50mm x 25mm specification.

Title	Cable Trunking Systems for Electrical Installations
British Standards Publication Date Replaces International Relationships	BS EN 50085-2-1: 2006 + A1: 2011 30th Nov 2006 BS4678-1: 1971 EN 50085-2-1: 2006
Minimum Transport & Storage Temperature	-25 °C
Maximum Transport & Storage Temperature	+60 °C
Minimum Installation & Application Temperature	-25 °C
Fire	Non flame propagating
Continuity	Our cable trunking systems have electrical continuity characteristics
Insulation	Cable trunking systems do not have electrical insulating properties
Separation	Single compartment cable trunking systems do not have internal protective partition
Installation Positions	Cable trunking products can be mounted on a wall or ceiling
Screw Tightening	Screws intended to be tightened should be done so with a screwdriver at a torque of 2Nm
Assembly	Components fit together using integral couplers & hank bush fixings
Maximum Voltage for Installations	1000v a.c & 1500v d.c


Available Finishes: Ordering Information: For finishes please add relevant suffix to the part number e.g. ASG55/3/PG	/PG		Pre Galvanised	BS EN 10346: 2015
	/PC		Powder Coated	BS EN 13438:2013
	/CPC		Clear Polyester Coating	BS 6496/7
	/LSF		Low Smoke Fume	Only available in PC or CPC finishes
	/SS		304 Grade Stainless Steel	BS EN 10088-1:2014
			316 Grade Stainless Steel	BS EN 10088-1:2014

STANDARDS & SPECIFICATIONS

Lighting Trunking



Lighting Trunking		
size	3m	5m
50 x 50	ASG55/3 3.4kg	ASG55/5 5.67kg

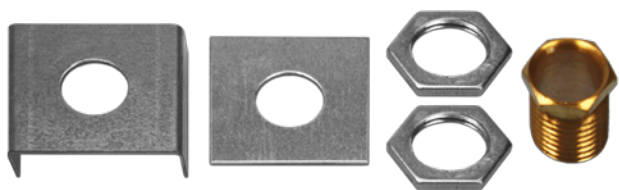

ABSS - Bush Suspension Set

Choice of plastic or metal capping lids

APCW/2 - Plastic



ASSB55/10 - Stirrup Hanger



ASCG/2 - Galvanised



MANUFACTURING the **difference**

The information contained in this technical specification has been carefully compiled but we do not accept any responsibility for loss caused by any error contained herein.

We reserve the right to alter technical details without prior notice.
© Armorduct Systems Limited 2021



Building 9 The Pensnett Estate Kingswinford West Midlands DY67TG
sales@armorduct.com **01384 233445** www.armorduct.com