


DATA SHEET

Wall Brackets

12/07/2018 <mark>1/8</mark>

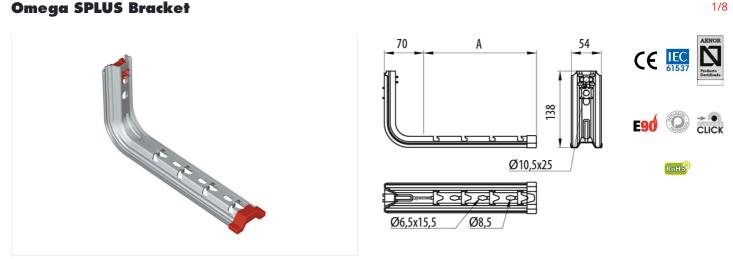

Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted on the wall, channel or from the ceiling. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various finishes.

Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

Reinforced omega profile. Increase support features. Includes plugs and protectors to facilitate installation and safeguard the installer.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Available in several finishes: pre galvanised, hot dip galvanised, organic mineral BLACK C8 and stainless steel AISI 304 and AISI 316L.

Applications

Suitable for supporting medium loads of cable trays for electrical installations and/or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.



INDUSTRIA ALIMENTARIA FOTOVOLTAICA CENTROS DE DATOS EDIFICACIÓN. TERCIARIO RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

1537 MVE-1 🔡 🛛 💬 🖪 🤇 🗑 E90

Dpemsa

Wall Brackets

Product data

Omega SPLUS Bracket

Main technical characteristics

🛞 P.G., H.D.G., AISI 304, AISI 316L, C8	▲▶ 100, 150, 200, 300, 400

.G., H.D.G., AISI 304, AISI 316L, C8

300, 100

뜃 5 u

🐮 -50°/ 150°

EC001003

ETIM

0	Cass IEC 61537	${\rm P}$	Ref	kg/u	Ø	$\bigcup_{(kg)}^{\textbf{CTA}}$	遂
P.G.	Class 2	100	62021104	0,248	Steel with surface coating	60	E90 (90 min. 1000°C)
P.G.	Class 2	150	62021154	0,275	Steel with surface coating	60	E90 (90 min. 1000°C)
P.G.	Class 2	200	62021204	0,451	Steel with surface coating	60	E90 (90 min. 1000°C)
P.G.	Class 2	300	62021304	0,572	Steel with surface coating	38	E90 (90 min. 1000°C)
P.G.	Class 2	400	62021404	0,693	Steel with surface coating	28	E90 (90 min. 1000°C)
H.D.G.	Class 6	100	62031104	0,256	Steel with surface coating	60	E90 (90 min. 1000°C)
H.D.G.	Class 6	150	62031154	0,284	Steel with surface coating	60	E90 (90 min. 1000°C)
H.D.G.	Class 6	200	62031204	0,462	Steel with surface coating	60	E90 (90 min. 1000°C)
H.D.G.	Class 6	300	62031304	0,586	Steel with surface coating	38	E90 (90 min. 1000°C)
H.D.G.	Class 6	400	62031404	0,710	Steel with surface coating	28	E90 (90 min. 1000°C)
AISI 304	Class 9C	100	62051104	0,257	Stainless Steel AISI 304	60	A1 No combustible
AISI 304	Class 9C	150	62051154	0,287	Stainless Steel AISI 304	60	A1 No combustible
AISI 304	Class 9C	200	62051204	0,450	Stainless Steel AISI 304	60	A1 No combustible
AISI 304	Class 9C	300	62051304	0,565	Stainless Steel AISI 304	38	A1 No combustible
AISI 304	Class 9C	400	62051404	0,680	Stainless Steel AISI 304	28	A1 No combustible
AISI 316L	Class 9D	100	62061104	0,257	Stainless Steel AISI 316L	60	A1 No combustible
AISI 316L	Class 9D	150	62061154	0,287	Stainless Steel AISI 316L	60	A1 No combustible
AISI 316L	Class 9D	200	62061204	0,450	Stainless Steel AISI 316L	60	A1 No combustible
AISI 316L	Class 9D	300	62061304	0,565	Stainless Steel AISI 316L	38	A1 No combustible
AISI 316L	Class 9D	400	62061404	0,680	Stainless Steel AISI 316L	28	A1 No combustible
C8	Class 8	100	62081104	0,260	Steel with surface coating	60	E90 (90 min. 1000°C)
C8	Class 8	150	62081154	0,289	Steel with surface coating	60	E90 (90 min. 1000°C)
C8	Class 8	200	62081204	0,455	Steel with surface coating	60	E90 (90 min. 1000°C)
C8	Class 8	300	62081304	0,571	Steel with surface coating	38	E90 (90 min. 1000°C)
C8	Class 8	400	62081404	0,686	Steel with surface coating	28	E90 (90 min. 1000°C)

Coatings

EZ - Electrogalvanized, white, according to EN ISO 2081. Class 3 protection in compliance with product standard EN 61537. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Class 4 protection in compliance with product standard EN 61537. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Class 6 protection in compliance with product standard EN 61537. Appropriate for outdoor installations and aggressive environments.

BLACK C8 - High Resistance coating, Black Colour. Class 8 of protection in compliance with product standard EN 61537. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicron treatment. Class 9 protection. Appropriate for outdoor installations and highly aggressive environments.



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

153 M.VE-1 🍟 🖪 👄 🖪 (E 🗰 E90

DATA SHEET

12/07/2018 <mark>2/8</mark>

Dpemsa

Wall Brackets

Omega SPLUS Bracket

12/07/2018 <mark>3/8</mark>

Load diagrams

↓CTA↓ (kg)		kg
	100	60
	150	60
	200	60
	300	38
	400	28


Product applications



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, SA."

DATA SHEET



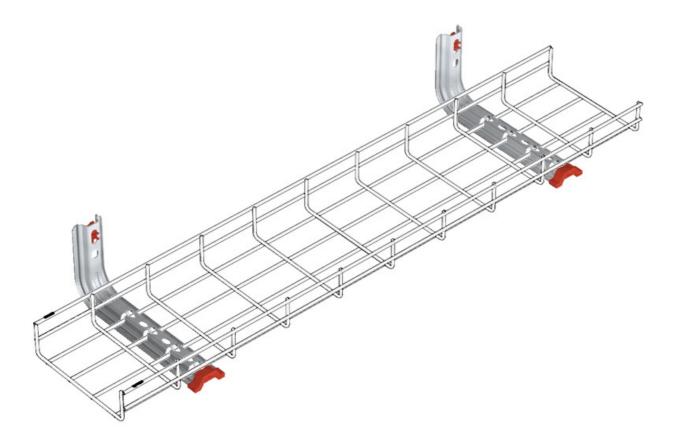



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

EG MARE-1 🎦 📓 🗁 🖪 🤇 🤆 📟 E90



DATA SHEET

12/07/2018 5/8

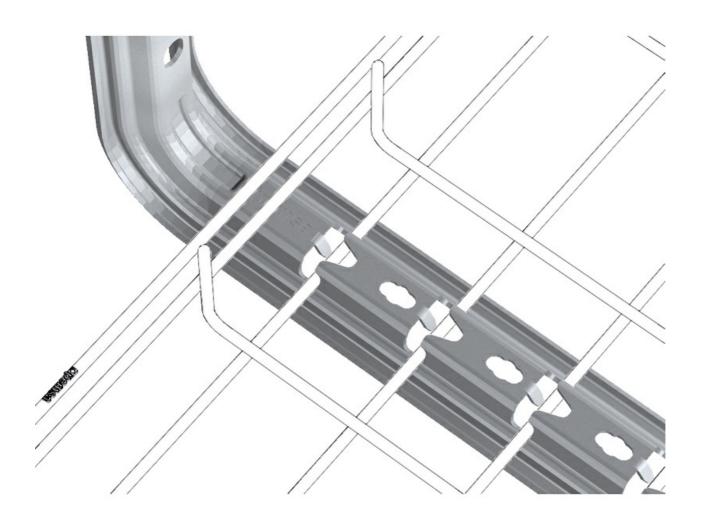




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



DATA SHEET

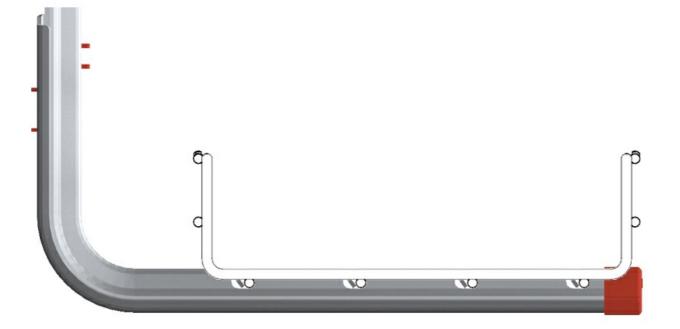



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




F					
	\square	\square	\square	\square	\frown
	\square	\square	\square	\square	\square
	\square	\square	\square	\square	\square
	\square	\bigcirc	\square	\square	\bigcirc
	\bigcirc	\square	\square	\square	\square
	\square	$\overline{}$	\square	\square	\bigcirc
	\square	\square	\square	\square	\square
				\square	\square



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, SA."



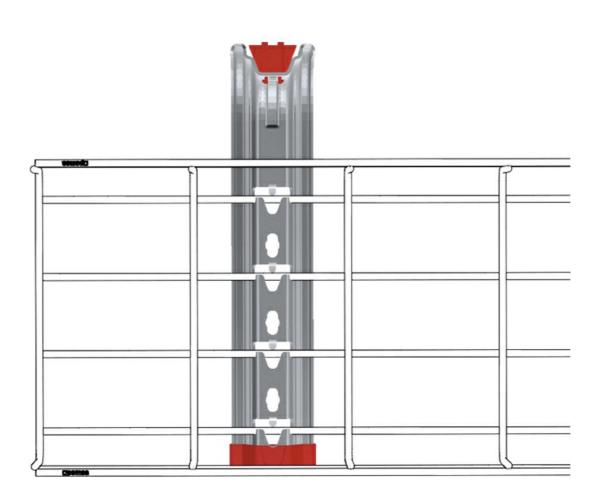



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

155 MAVE-1 😫 🖻 👄 🖪 🤇 🤆 📟 E90