
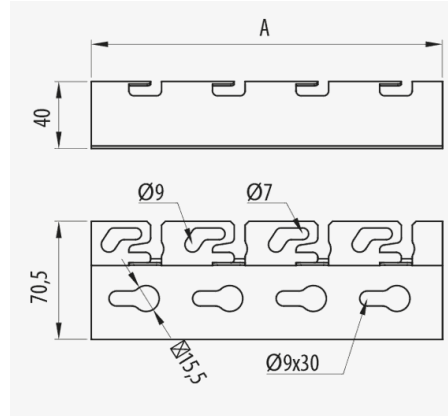


**Stand off Bracket Click**

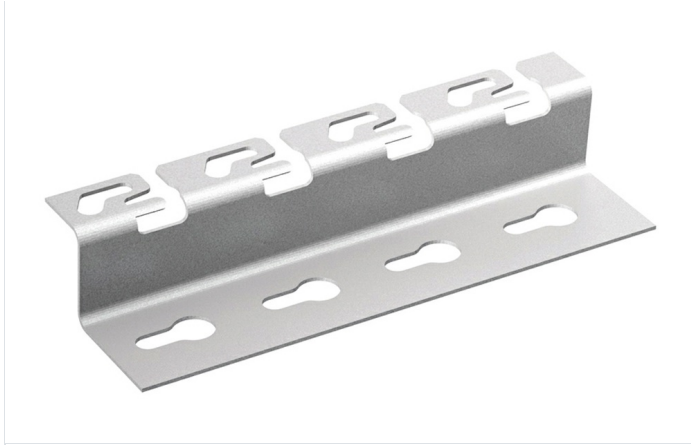

**Description**

**Advantages**

**Applications**

**Solutions**



INDUSTRIA ALIMENTARIA FOTOVOLTAICA



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



**Stand off Bracket Click**

**Main technical characteristics**

P.G., H.D.G., AISI 304, AISI 316L | 
 40 | 
 100, 200, 300 | 
 10 u | 
 CTA1 250 | 
 -50° / 150° | 
 A1 No combustible | 
 ETIM EC000022

**Product data**

	Class EN 61537	Ø	Ref	kg/u	
P.G.	Class 2	100	67020520	0,119	Steel with surface coating
P.G.	Class 2	200	67020522	0,225	Steel with surface coating
P.G.	Class 2	300	67020524	0,331	Steel with surface coating
H.D.G.	Class 6	100	67030520	0,128	Steel with surface coating
H.D.G.	Class 6	200	67030522	0,241	Steel with surface coating
H.D.G.	Class 6	300	67030524	0,355	Steel with surface coating
AISI 304	Class 9C	100	67050520	0,121	Stainless Steel AISI 304
AISI 304	Class 9C	200	67050522	0,228	Stainless Steel AISI 304
AISI 304	Class 9C	300	67050524	0,336	Stainless Steel AISI 304
AISI 316L	Class 9D	100	67060520	0,121	Stainless Steel AISI 316L
AISI 316L	Class 9D	200	67060522	0,228	Stainless Steel AISI 316L
AISI 316L	Class 9D	300	67060524	0,336	Stainless Steel AISI 316L

**Coatings**

**EZ** - Electrogalvanized, white, according to EN ISO 2081. Class 3 protection in compliance with product standard EN 61537. Electrolytic zinc protection adequate for indoor installations.

**BC** - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Class 4 protection in compliance with product standard EN 61537. Improved resistance to corrosion, especially adequate for demanding indoor installations.

**GC** - Hot-dipped galvanizing in compliance with EN ISO 1461. Class 6 protection in compliance with product standard EN 61537. Appropriate for outdoor installations and aggressive environments.

**BLACK C8** - High Resistance coating, Black Colour. Class 8 of protection in compliance with product standard EN 61537. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

**304 and 316L** stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Class 9 protection. Appropriate for outdoor installations and highly aggressive environments.




[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)




Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

**Stand off Bracket Click**

Product applications

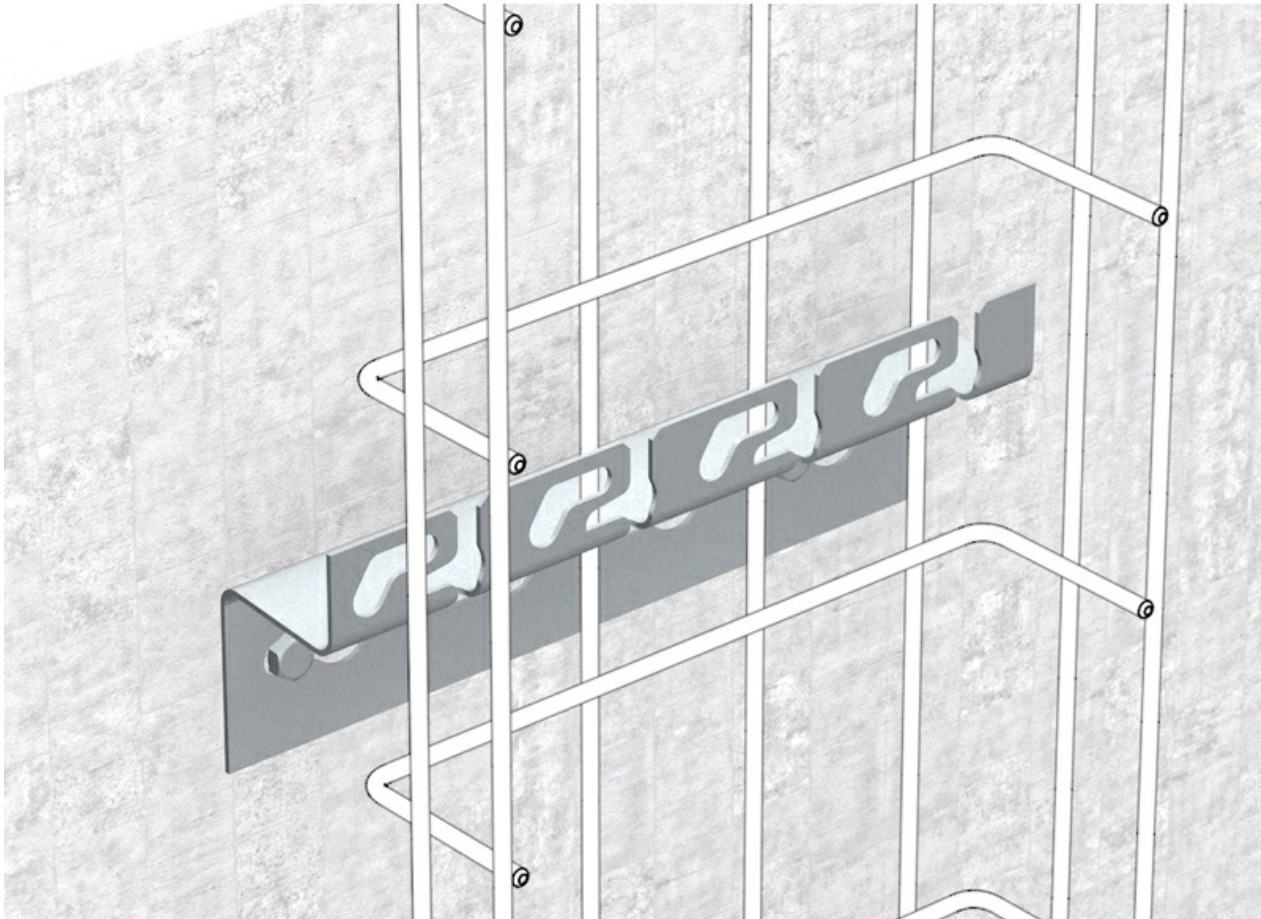

**Stand off Bracket Click**

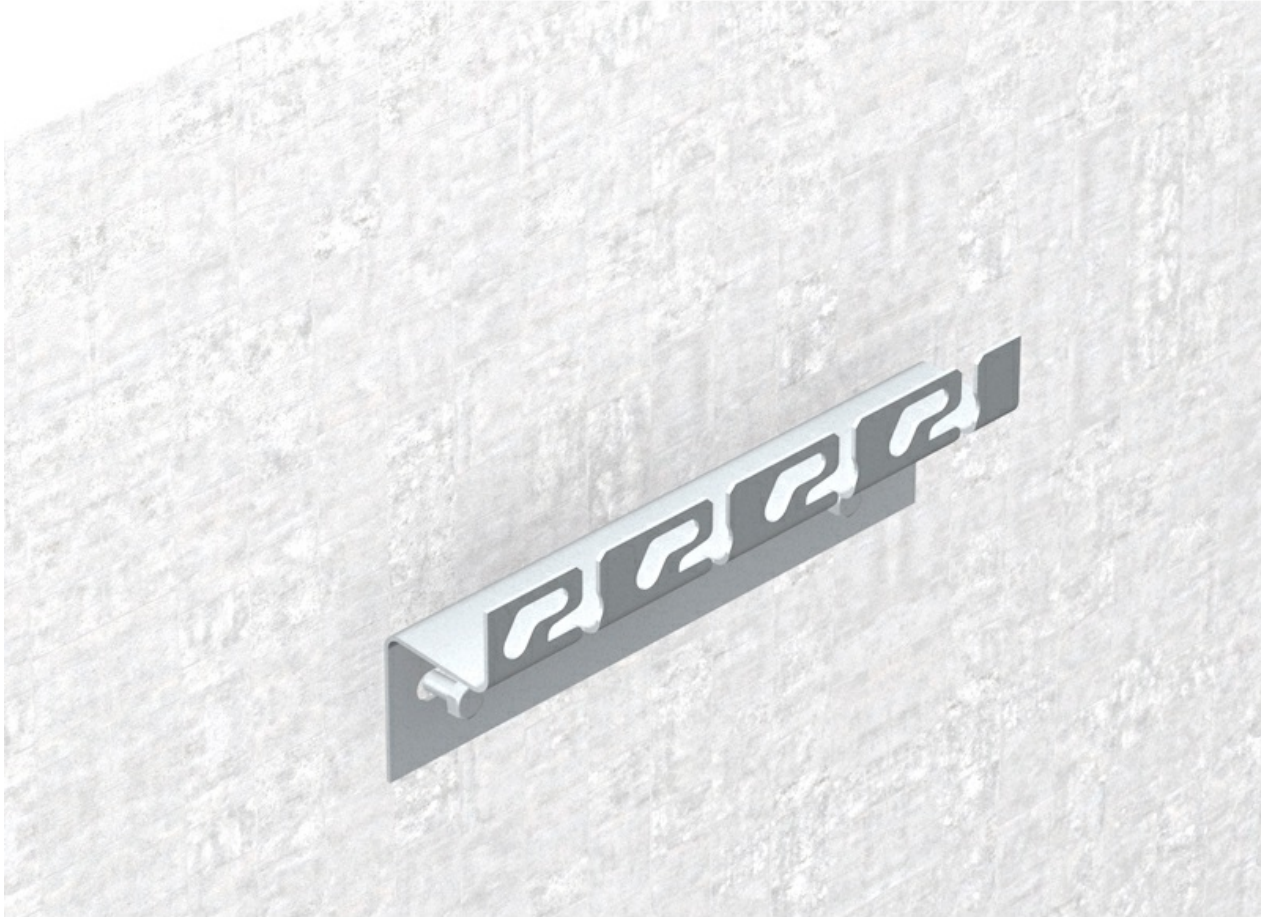



**Stand off Bracket Click**

