


Product Data Sheet

Medium Duty Adjustable Riser

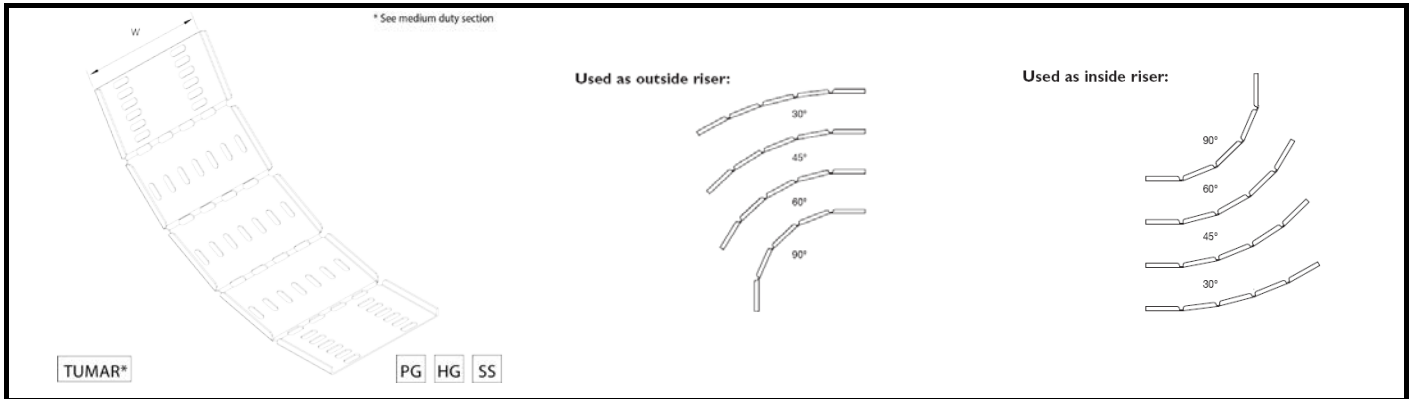

Part No.	Finish			W mm	TUMAR		W mm
	PG	HG	SS		mm	mm	
TUMAR050	•	•	•	50	0.8	0.18	
TUMAR075	•	•	•	75	0.8	0.24	
TUMAR100	•	•	•	100	0.8	0.31	
TUMAR150	•	•	•	150	0.8	0.43	
TUMAR225	•	•	•	225	0.8	0.63	
TUMAR300	•	•	•	300	1.2	0.81	
TUMAR450	•	•	•	450	1.2	1.20	
TUMAR600	•	•	•	600	1.2	2.47	
TUMAR750	•	•	•	750	2.0	3.190	
TUMAR900	•	•	•	900	2.0	4.010	

Forming:

Form on site using a former (i.e. Timber)

Assembly:

One piece assembly

Material:

- PG Pre-Galvanised Steel to BS EN 10346 DX51D Z275-N-A-C
- HG Mild Steel to BS EN 10111 - DD11 or BS EN 10139 - DC01
- DH BS EN 10025 S275JO+AR+CL1 or equivalent/better - 2mm thick min. material.
- SS Stainless Steel - Hot Rolled to B.S.EN10088-2-1.4404+1D

Finishes:

- PG Pre Galvanised to BS EN 10346 Z275 standard.
- HG Hot Dip Galvanized - to BS EN ISO 1461: to a mean coating thickness (minimum) of 55 µm.
- DH Hot Dip Galvanized - to BS EN ISO 1461: to a mean coating thickness (minimum) of 85 µm.
110 µm available upon request
- SS Stainless Steel - Grade 1.4404 (316L)