


Base Support 60

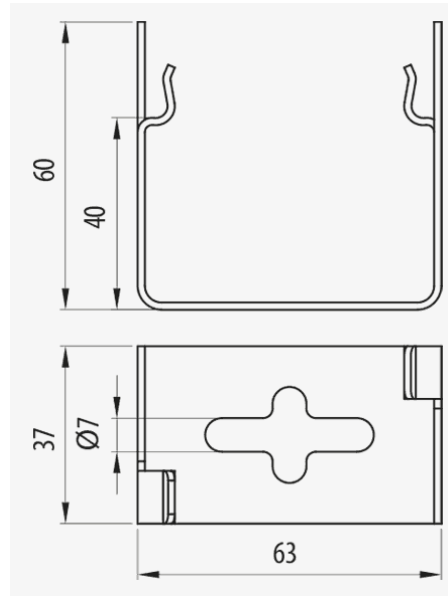

Description

Rejiband® light steel support for the channel, wall, ceiling or floor installation of the Rejiband® 35x60 & 60x60 mm wire mesh tray. Quick assembly thanks to the Click system of connection without the need of screws. Available in various finishes.

Advantages

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

It allows the introduction of cables into the tray from the side.

Available in various finishes: Electrozinc, bichromate, hot dip galvanized, organic mineral BLACK C8 and passivated stainless steel AISI 316.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions



INDUSTRIA ALIMENTARIA



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Base Support 60

Main technical characteristics

E.G., Bycro (BC), H.D.G., AISI 316L, C8	kg/u 0,066	10 u	-50°/ 150°	A1 No combustible	ETIM EC000022
---	------------	------	------------	-------------------	------------------

Product data

	Class EC 61537	Ref	
E.G.	Class 3	62016022	Steel with surface coating
Bycro (BC)	Class 5	62026022	Steel with surface coating
H.D.G.	Class 5	62036022	Steel with surface coating
AISI 316L	Class 9D	62066022	Stainless Steel AISI 316L
C8	Class 8	62086022	Steel with surface coating

Coatings

- EZ** - Electrogalvanized, white, according to EN ISO 2081. Class 3 protection in compliance with product standard EN 61537. Electrolytic zinc protection adequate for indoor installations.
- BC** - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Class 4 protection in compliance with product standard EN 61537. Improved resistance to corrosion, especially adequate for demanding indoor installations.
- GC** - Hot-dipped galvanizing in compliance with EN ISO 1461. Class 6 protection in compliance with product standard EN 61537. Appropriate for outdoor installations and aggressive environments.
- BLACK C8** - High Resistance coating, Black Colour. Class 8 of protection in compliance with product standard EN 61537. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.
- 304 and 316L** stainless steel, in compliance with EN 10088 standard, with passivated Thermicon treatment. Class 9 protection. Appropriate for outdoor installations and highly aggressive environments.



Base Support 60

Product applications

