


Side Support 60

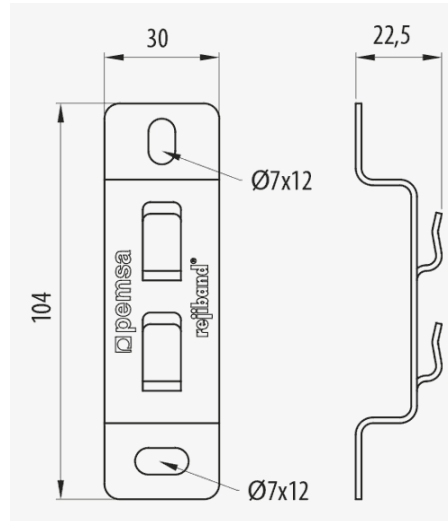

Description

Rejiband® support in steel used for the wall installation of the Rejiband® wire mesh tray 60 mm high and 60, 100 and 150 mm wide. Can also be used for ceiling installation with rod. Quick assembly thanks to the Click system of connection without the need of screws. Available in various finishes.

Advantages

Fixing by quick mount click system.

Suitable for ceiling installation using an M8 threaded rod. It allows easy adjustment on the rod and only requires a nut for fixing.

Can be used for ceiling installations with two rejiband trays using a bracket on each side of the tray.

It allows the introduction of cables into the tray from the side.

Available in different finishes: Electrogalvanised, electrozinc plated, hot dip galvanised and passivated stainless steel AISI 316.

Applications

Suitable for wall and ceiling mounting with threaded rod of Rejiband® wire mesh tray 60 mm wide and widths of 100 and 150. Suitable for electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



INDUSTRIA ALIMENTARIA



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Side Support 60

Main technical characteristics

E.G., Bycro (BC), H.D.G., AISI 316L, C8	25 u	25	-50°/ 150°	A1 No combustible	ETIM EC000022
---	------	----	------------	-------------------	------------------

Product data

	Class EN 61537	Ref	kg/u	
E.G.	Class 3	62011060	0,042	Steel with surface coating
Bycro (BC)	Class 5	62021060	0,042	Steel with surface coating
H.D.G.	Class 5	62031060	0,044	Steel with surface coating
AISI 316L	Class 9D	62061060	0,042	Stainless Steel AISI 316L
C8	Class 8	62081060	0,042	Steel with surface coating

Coatings

EZ - Electrogalvanized, white, according to EN ISO 2081. Class 3 protection in compliance with product standard EN 61537. Electrolytic zinc protection adequate for indoor installations.

BC - Electrogalvanized Bycro, yellow, in compliance with EN ISO 2081. Class 4 protection in compliance with product standard EN 61537. Improved resistance to corrosion, especially adequate for demanding indoor installations.

GC - Hot-dipped galvanizing in compliance with EN ISO 1461. Class 6 protection in compliance with product standard EN 61537. Appropriate for outdoor installations and aggressive environments.


BLACK C8 - High Resistance coating, Black Colour. Class 8 of protection in compliance with product standard EN 61537. Neutral Salt Spray Chamber test >1000 h acc. to ISO 9227.

304 and 316L stainless steel, in compliance with EN 10088 standard, with passivated Thermicron treatment. Class 9 protection. Appropriate for outdoor installations and highly aggressive environments.




Side Support 60


Product applications

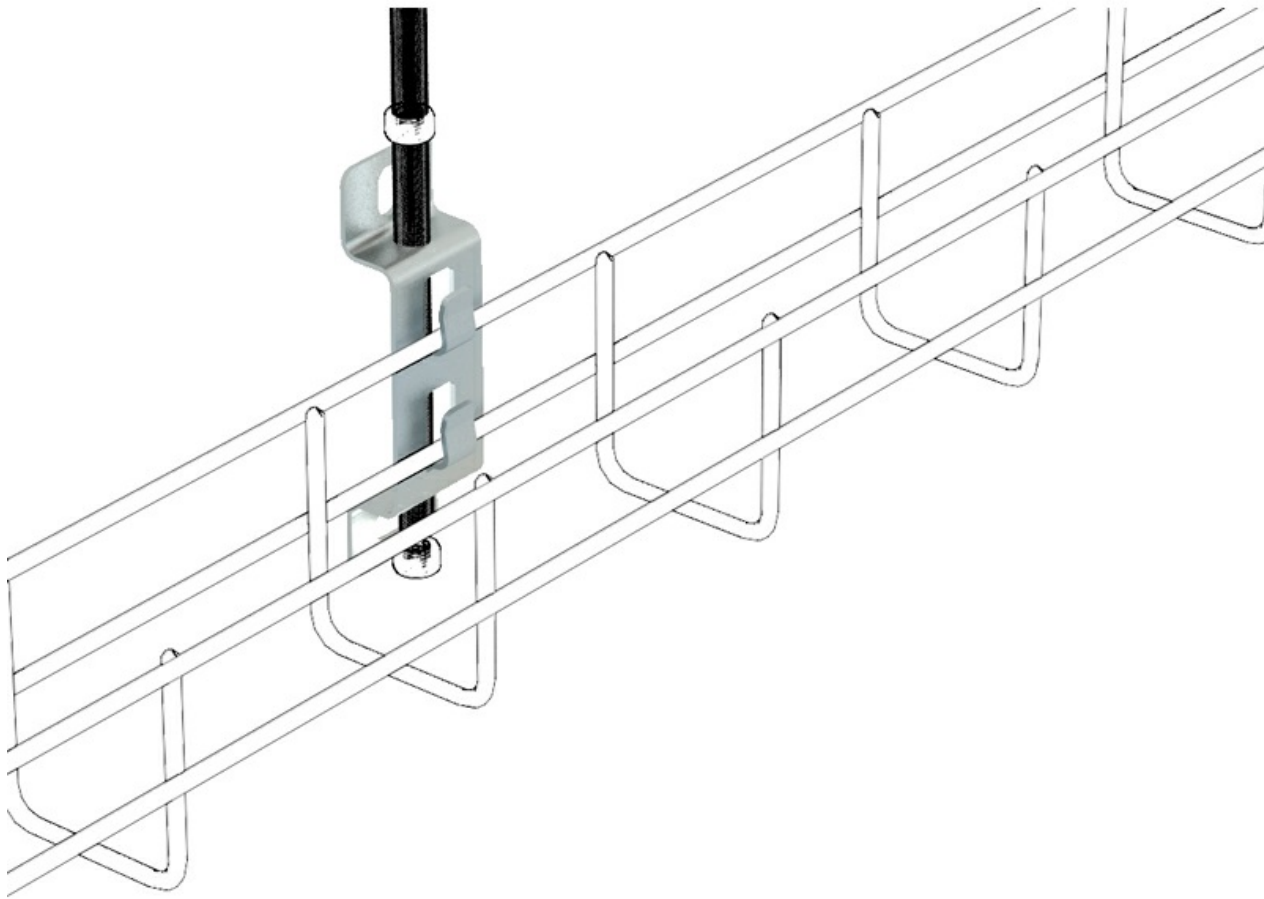

Side Support 60

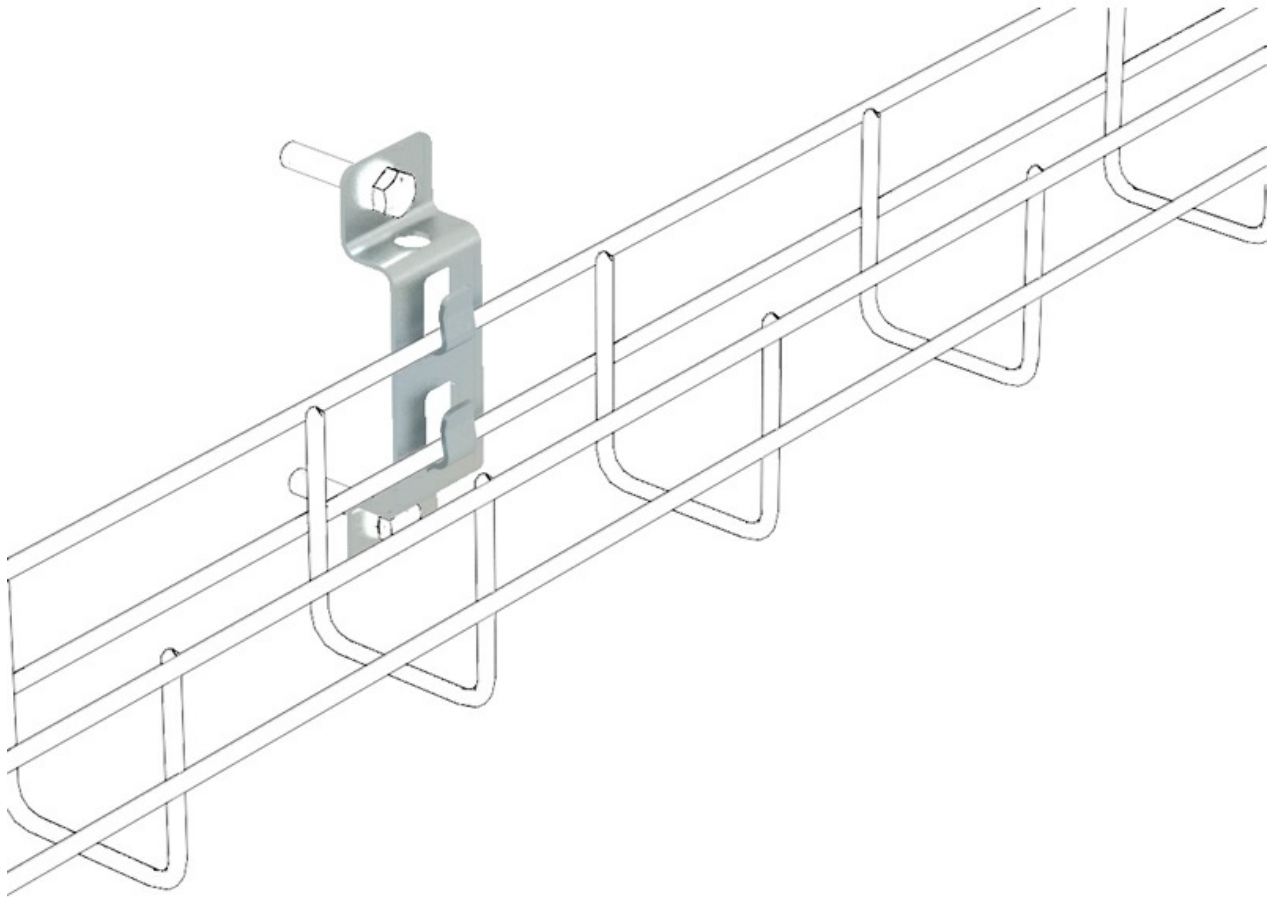

Side Support 60

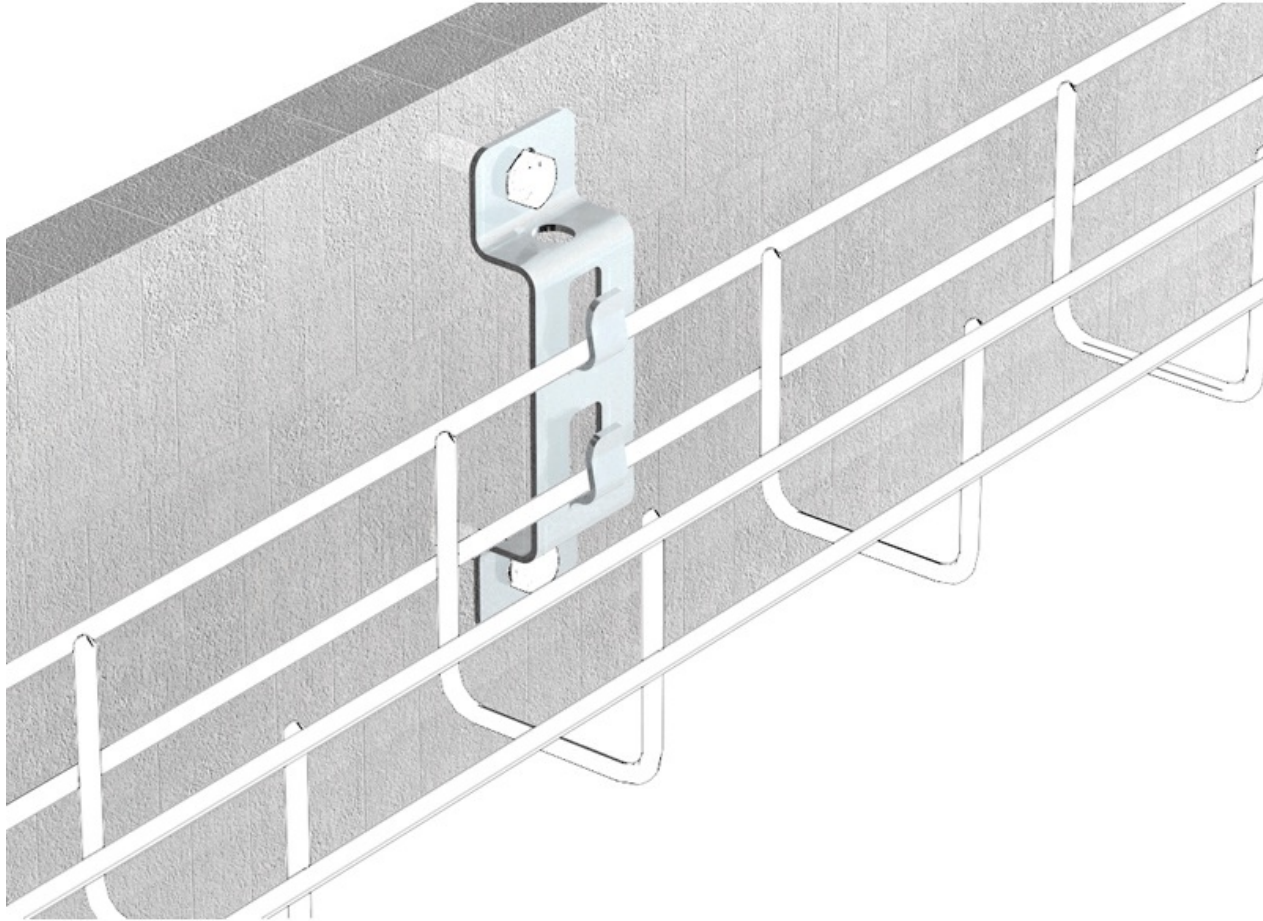

Side Support 60

